


- Small, but it has powerful towing capacity
- Tight turning radius for increased mobility in narrow places
- Suitable for towing trailers and bulky cargos in manufacturing and warehousing



■ SCT-2000

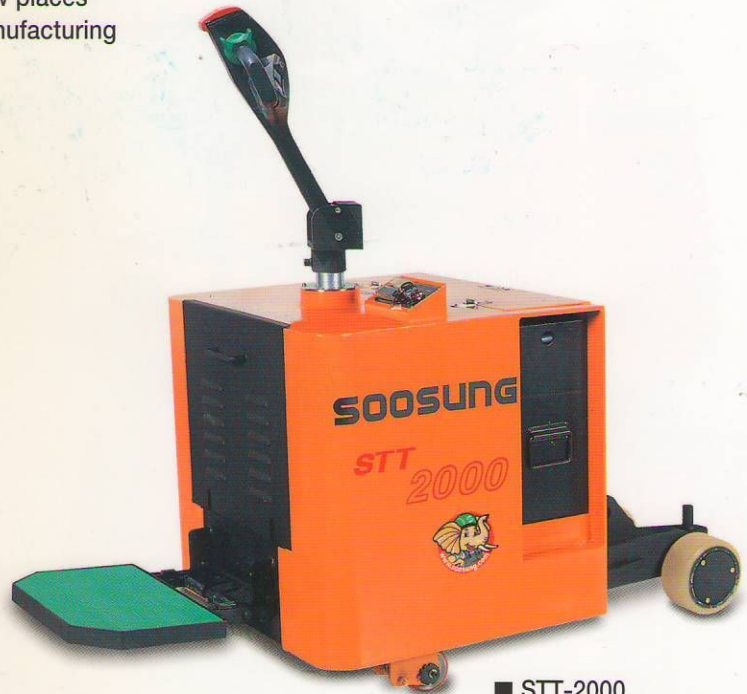

■ STT-2000

### Specifications

Model	Unit	STT-2000	SCT-2000
Towing Capacity	kg	2000	2000
Towing Power	kg	50	50
Lifted Drawbar Height	mm	325	325
Lowered Drawbar Height	mm	200	200
Drawbar	mm	ø 30 × 60L	ø 30 × 60L
Grade Clearance	%	10	10
Overall Length	mm	1339	1464
Overall Width	mm	750	750
Overall Height	mm	1390	1390
Weight	kg	720	843
Turning Radius	mm	1120	1400
Travel speed	With Load	km/hr	4~5
	Without Load	km/hr	5~6
Motor	Drive Motor	kw	24V × 1,1
	Hydraulic Motor	kw	24V × 2
Battery	-	24V × 170Ah/5Hr	24V × 170Ah/5Hr
Battery Charger	-	1 ø × 220V, 60Hz	1 ø × 220V, 60Hz
Control System	Drive	-	F, E, T CONTROL TYPE
	Hydraulic	-	MAGNETIC CONTACTOR TYPE

※ The above specifications are subject to change without prior notice.



**SOOSUNG LIFT MFG. CO., LTD.**

673-18, Gyeongseo-dong, Seo-gu, Incheon, 404-170, Korea

Tel : 82-32-820-5131 Fax : 82-32-584-5162

e-mail : soosung@soosung.com

website : www.soosung.com